

# DRAW WIRE

## **Drawwire-Positionssensor-HX**



**Serie HX**

- Ranges bis 0-50...50.000 mm
- Positions- and VELOCITY-POSITION OUTPUT
- Linearity  $\pm 0,1\% \text{ MB}$
- Analog-, TTL, HTL, selfgenerating tachometer
- Wire Rope Stainless Steel or Nylon Jacketed
- Betriebstemperatur -25°C...+95°C
- Optional Ingress Protection NEMA 6 (IP68)

## HX

UniMeasure

### GENERAL CONSTRUCTION FEATURES

#### MEASUREMENT RANGES TO 80" (2 m)

Integral wire rope  
dust wiper

Anodized aluminum/  
stainless steel Housing  
(All stainless optional)

Low friction shaft seal


O-ring sealed sensor/  
mechanism chamber

Extremely rigid  
2 point mount

Small footprint mounting base

ENVIRONMENTALLY SEALED

Fig. 1

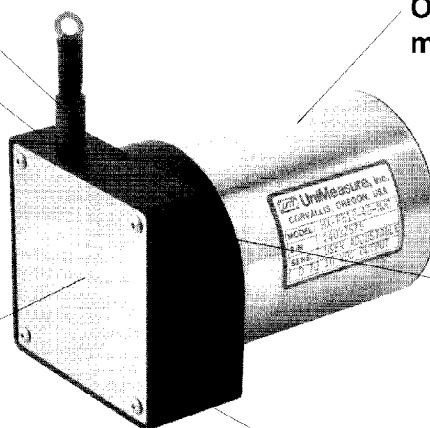

#### MEASUREMENT RANGES FROM 100" (2.5 m) TO 2000" (50 m)

316 Stainless Steel  
mounting base

Integral wire rope  
dust wiper

High impact, chemical  
resistant polyurethane  
cover (both ends)


Low friction  
shaft seal

O-ring sealed sensor/  
mechanism chamber

Extremely rigid  
2 point mount

ENVIRONMENTALLY SEALED

Fig. 2

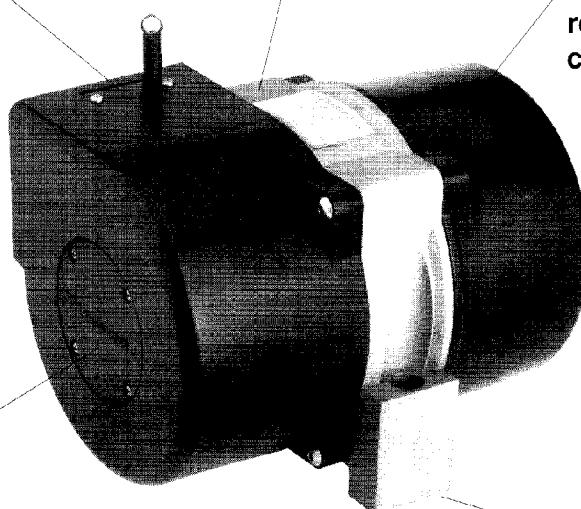

See Table 4 (page 8) for additional mechanical specifications


# HX-PA SERIES

 UniMeasure

## RATIOMETRIC VOLTAGE OUTPUT

Utilizing a precision potentiometer, the UniMeasure HX-PA series position transducer provides basic absolute positioning with an analog output. With a steady state input voltage, and with the potentiometer connected as a voltage divider, the ratiometric output voltage is directly proportional to wire rope extension. The unit will function with any input voltage up to 25 volts maximum. To obtain best output linearity, the input voltage should be well regulated.

### CONNECTION DIAGRAM



### MODEL NUMBER CONFIGURATION

HX-PA- - - -

Measurement Range Designator  
from standard ranges shown in  
**Table 4**, page 8

Option designators from  
**OPTIONS** list (page 9) in order of  
appearance on OPTIONS list

### General

Available Measurement Ranges .....	See Table 4, Page 8
Sensing Device .....	Precision Potentiometer
Connector .....	MS3102E-14S-6P
Mating Connector (included) .....	MS3106E-14S-6S

### SPECIFICATIONS

### Performance

Linearity	
2", 3", 4" & 5" Ranges .....	±0.25% Full Scale
10", 15", 20" & 25" .....	±0.15% Full Scale
All other ranges .....	±0.10% Full Scale
Repeatability .....	±0.015% Full Scale
Resolution .....	Essentially Infinite

### Electrical

Input Impedance .....	1000 Ω ±10%
Output Impedance .....	0 to 1000 Ω
Excitation Voltage .....	25 Volts Max. AC or DC
Nominal Output Voltage .....	990 mV/V/inch (Use total measurement range in calculation)
Range in Inches .....	990 mV/mm
Range in mm .....	990 mV/mm

### Environmental


Thermal Coefficient of Sensing Element .....	±100 PPM/°C Max.
Operating Temperature .....	-25°C to 95°C
Operating Humidity .....	100%
Shock .....	50 G @ 0.1 ms Max.
Vibration .....	10 Hz to 2000 Hz, 15 G peak
Ingress Protection Exclusive of Wire Rope Area .....	NEMA 4 (IP-65)
Optional Ingress Protection .....	NEMA 6 (IP-68)

# HX-PB SERIES

## BRIDGE CIRCUIT VOLTAGE OUTPUT

The UniMeasure HX-PB series transducer includes the sensing potentiometer in a bridge circuit with adjustable zero and span controls. The completely passive circuit gives a maximum output voltage at maximum span setting of approximately 18% of the input voltage. The span adjustment allows for easy interface to a bridge amplifier. With zero position adjustable to anywhere within the total range of the transducer, voltage output is positive when extending the cable from the selected zero position and is negative when retracting from zero.

### CONNECTION DIAGRAM

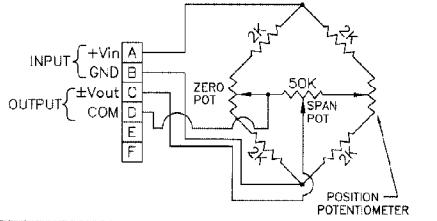

### MODEL NUMBER CONFIGURATION

HX-PB- - - -

Measurement Range Designator  
from standard ranges shown in  
**Table 4**, page 8

Option designators from  
**OPTIONS** list (page 9) in order of  
appearance on OPTIONS list

### General

Available Measurement Ranges .....	See Table 4, Page 8
Sensing Device .....	Precision Potentiometer
Connector .....	MS3102E-14S-6P
Mating Connector (included) .....	MS3106E-14S-6S

### SPECIFICATIONS

### Performance

Linearity	
2", 3", 4" & 5" Ranges .....	±0.25% Full Scale
10", 15", 20" & 25" .....	±0.15% Full Scale
All other ranges .....	±0.10% Full Scale
Repeatability .....	±0.015% Full Scale
Resolution .....	Essentially Infinite

### Electrical

Input Impedance .....	1.25KΩ
Output Impedance .....	1.25KΩ at max span setting 14.4KΩ @ 51% max. span setting
Excitation Voltage .....	25 Volts Max. AC or DC
Output Voltage .....	User adjustable to a maximum of 18% of Input Voltage

### Environmental

Thermal Coefficient of Sensing Element .....	±100 PPM/°C Max.
Operating Temperature .....	-25°C to 95°C
Operating Humidity .....	100%
Shock .....	50 G @ 0.1 ms Max.
Vibration .....	10 Hz to 2000 Hz, 15 G peak
Ingress Protection Exclusive of Wire Rope Area .....	NEMA 4 (IP-65)
Optional Ingress Protection .....	NEMA 6 (IP-68)


## Technische Daten

# HX-P420 SERIES

 UniMeasure

## 4 to 20 mA OUTPUT

The HX-P420 position transducer provides a 4 to 20 mA output signal with a potentiometric sensor. The HX-P420 is particularly advantageous in electrically noisy environments. Since the transmitter is loop powered, an assembled system consists of a power supply, current monitor, and transmitter all connected in series. Zero and span adjustments allow setting the 4 mA position within the first 30% of total travel and setting the 20 mA position within 80% to 100% of total travel. The HX-P420 may be powered with a supply voltage in the range of 12 to 35 VDC subject to the total loop resistance.

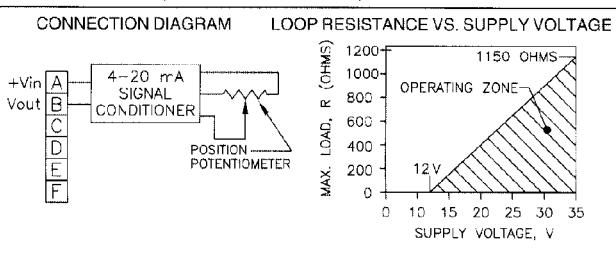

### MODEL NUMBER CONFIGURATION

**HX-P420-**    -    -   

**Measurement Range Designator** — from standard ranges shown in **Table 4**, page 8

Option designators from **OPTIONS** list (page 9) in order of appearance on **OPTIONS** list

### General

Available Measurement Ranges .... See Table 4, Page 8  
Connector ..... MS3102E-14S-6P  
Mating Connector (included) ..... MS3106E-14S-6S

### Performance

#### Linearity

2", 3", 4" & 5" Ranges ..... ±0.30% Full Scale  
10", 15", 20" & 25" Ranges ..... ±0.20% Full Scale  
All other ranges ..... ±0.15% Full Scale

Repeatability ..... ±0.015% Full Scale

Resolution ..... Essentially Infinite

### Electrical

Output ..... User Adjustable 4 to 20 mA  
Excitation Voltage ..... 12 to 35 VDC  
Min. Supply Voltage ..... (.02 x Load Res.) + 12 VDC  
Insulation Resistance ..... 100 Megohms min. at 100 VDC  
Adjustment Range  
4 mA ..... 0 to 30% of Range  
20 mA ..... 80% to 100% of Range  
Protection ..... Reversed Polarity

### Environmental

Thermal Coefficient of sensing element ..... ±100 PPM/°C max.  
Operating temperature ..... -25°C to 80°C  
Operating humidity ..... 100%  
Vibration ..... 15 G's 0.1 ms max.  
Shock ..... 50 G's 0.1 ms max.

#### Ingress Protection


Exclusive of Wire Rope Area ..... NEMA 4 (IP-65)  
Optional Ingress Protection ..... NEMA 6 (IP-68)

### SPECIFICATIONS

# HX-P510 SERIES

## 0 to 5 VDC or 0 to 10 VDC OUTPUT

The HX-P510 position transducer provides a 0 to 5 or 0 to 10 VDC output utilizing a potentiometric sensor. Pins B and C of the connector are both COMMON and are connected together internally at the transducer enabling a three or four wire connection. With adjustable zero and span, zero position may be set within the first 30% of the total measurement range. The span allows maximum output voltage to be adjusted to 5 VDC or 10 VDC for displacements between 80% and 100% of total range. The HX-P510 may be powered by an unregulated supply voltage in the range of 11 to 35 VDC.

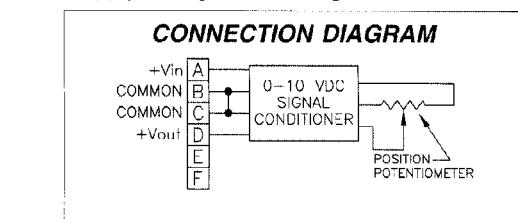

### MODEL NUMBER CONFIGURATION

**HX-P510-**    -    -   

**Measurement Range Designator** — from standard ranges shown in **Table 4**, page 8

Option designators from **OPTIONS** list (page 9) in order of appearance on **OPTIONS** list

### General

Available Measurement Ranges .... See Table 4, Page 8  
Sensing Device ..... Precision Potentiometer  
Connector ..... MS3102E-14S-6P  
Mating Connector (included) ..... MS3106E-14S-6S

### Performance

#### Linearity

2", 3", 4" & 5" Ranges ..... ±0.30% Full Scale  
10", 15", 20" & 25" Ranges ..... ±0.20% Full Scale  
All other ranges ..... ±0.15% Full Scale

Repeatability ..... ±0.015% Full Scale

Resolution ..... Essentially Infinite

### Electrical

Output ..... 0 to 5 VDC adjustable to 10 VDC  
Excitation Voltage ..... 11 to 35 VDC  
Excitation Current ..... 40 mA max.  
Output Impedance ..... 10Ω max.  
Output Load ..... 5KΩ min.  
Insulation resistance ..... 100 megohms min. at 100 VDC  
Zero Adjustment Range ..... 0 to 30% of Range  
Span Adjustment Range ..... 80% to 100% of Range  
Protection ..... Reversed Polarity

### Environmental

Operating temperature ..... 0°C to 55°C  
Storage Temperature ..... -40° to 70°C  
Operating humidity ..... 100%  
Vibration ..... 15 G's 0.1 ms max.  
Shock ..... 50 G's 0.1 ms max.

#### Ingress Protection

Exclusive of Wire Rope Area ..... NEMA 4 (IP-65)  
Optional Ingress Protection ..... NEMA 6 (IP-68)

### SPECIFICATIONS

## Technische Daten


# HX-P1010 SERIES

 UniMeasure

## $\pm 10\text{VDC}$ OUTPUT (Adjustable to $\pm 5\text{VDC}$ )

The UniMeasure HX-P1010 series position transducer provides an output voltage from -10 VDC to +10 VDC with adjustability to -5 VDC to +5 VDC. The zero position may be set within 10% to 90% of the total range of the transducer. The output voltage will be positive when the cable is extending from the zero position and negative when retracting from the zero position. The span may be adjusted to the maximum output voltage within 50% to 100% of the longest possible travel from the zero position, whether positive or negative.

A dual voltage input (+15 VDC, -15 VDC and COMMON) is required but optional single excitation voltages of +5, +12, +15, or +24 VDC are available. With optional single input voltages, the power supply ground is isolated from the output common.

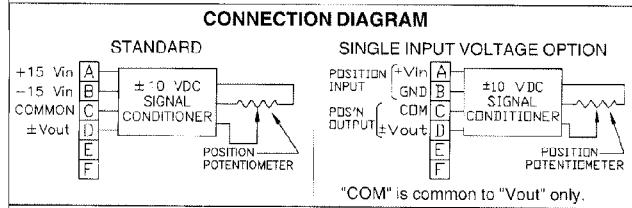

### MODEL NUMBER CONFIGURATION

**HX-P1010-** - - -

#### Measurement Range Designator

from standard ranges shown in Table 4, page 8

Optional Single Input Voltage from Table 1  
(Omit for standard input configuration)

Option designators from  
**OPTIONS** list (page 9) in  
order of appearance on  
**OPTIONS** list

### General

Available Measurement Ranges .... See Table 4, Page 8  
Connector ..... MS3102E-14S-6P  
Mating Connector (included) ..... MS3106E-14S-6S

### SPECIFICATIONS

#### Performance

##### Linearity

2", 3", 4" & 5" Ranges	.....	$\pm 0.30\%$ Full Scale
10", 15", 20" & 25" Ranges	.....	$\pm 0.20\%$ Full Scale
All other ranges	.....	$\pm 0.15\%$ Full Scale

##### Repeatability

.....  $\pm 0.015\%$  Full Scale

Resolution ..... Essentially Infinite

#### Electrical

Output ..... -10 VDC to +10 VDC

Excitation Voltage ..... +15 VDC  $\pm 10\%$ , -15 VDC  $\pm 10\%$

Input Current ..... 25 mA max.

Output Impedance ..... 1.0 $\Omega$  max.

Output Load ..... 5K $\Omega$  min.

Capacitive Load ..... 1000 pF

Zero Adjustment Range ..... 10% to 90% of Range

Span Adjustment Range ..... 50% to 100% of Longest Possible Travel from Zero Position

Protection ..... Reversed Polarity

Temperature Stability ..... 0.02%/ $^{\circ}\text{C}$  of Span

#### Environmental

Operating temperature ..... 0 $^{\circ}\text{C}$  to +70 $^{\circ}\text{C}$

Storage Temperature ..... -40 $^{\circ}\text{C}$  to +85 $^{\circ}\text{C}$

Operating humidity ..... 100%

Vibration ..... 15 G's 0.1 ms max.

Shock ..... 50 G's 0.1 ms max.


#### Ingress Protection

Exclusive of Wire Rope Area .... NEMA 4 (IP-65)

Optional Ingress Protection ..... NEMA 6 (IP-68)

**TABLE 1 ----- OPTIONAL SINGLE INPUT VOLTAGES**

Option Designator	Input Voltage	Input Current (mA max.)
SI5	+5	150
SI12	+12	65
SI15	+15	50
SI24	+24	32

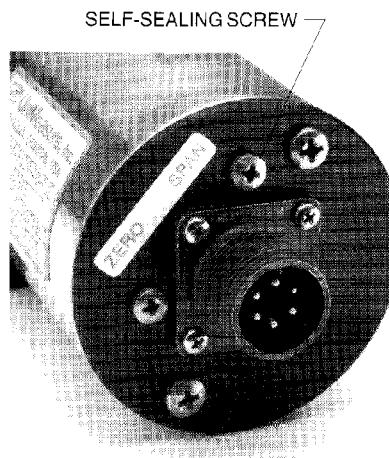

On models with zero and span controls (HX-PB, HX-P420, HX-P510, HX-P1010), access to zero and span adjustments is accomplished by removing o-ring scaling screws.

## Technische Daten

# HX-EP SERIES

UniMeasure

## DIGITAL OUTPUT

### SPECIFICATIONS

Utilizing an incremental encoder as the sensor, the UniMeasure HX-EP series position transducer provides a two channel square wave current sinking output signal in quadrature. The standard output is a single-ended TTL compatible square wave with  $2\text{K}\Omega$  pullup resistors provided internally. The resolution values shown in the specifications table indicate resolution for times 1 counting mode where a count is registered for one up transition in channel A. With interface electronics capable of times 2 or times 4 counting mode, a true resolutinal increase of 2 or 4 may be obtained. For example, the HX-EP-50 has a resolution of approximately .004" per count in times 1 counting mode whereas the resolution is approximately .001" per count in times 4 counting mode.

The actual resolution of a HX-EP transducer differs from unit to unit because of tolerances associated with the wire rope diameter and the capstan upon which the wire rope winds. The nylon jacketed wire rope option will have the effect of slightly reducing the resolution. Linearity and repeatability remain independent of resolution. In applications where the output count is interpreted as a percentage of total travel, resolutinal differences from unit to unit are not critical. However, in applications where the digital output is to be interfaced to a digital display to give an output in engineering units, the calibration constant supplied with the transducer may be used to calculate a suitable scale multiplier to produce the correct engineering units.

Alternative outputs shown in the "Optional Outputs" table below are available to facilitate interfacing to a variety of different types of equipment.

### MODEL NUMBER CONFIGURATION

**HX-EP-** - - -

**Measurement Range Designator** from standard ranges shown in Table 4, page 8

Option designators from **OPTIONS** list (page 9) in order of appearance on **OPTIONS** list

**Output Option** (Omit for standard output)

Use option designator from column A in "Optional Outputs" table below

**A**

### Optional Outputs

#### Index Channel

Adds index (Z) channel. Index is triggered within the first 0.25" (6 mm) of extension of the wire rope. Triggers repeatedly for each complete rotation of the internal capstan. See STANDARD OUTPUT box for output stage, waveform and connector wiring.

**"I"**

#### 8 to 28 VDC Current Sinking

35 mA current sinking output with  $10\text{K}\Omega$  internal pullup resistors 8 to 28 VDC input voltage

**"H1"**

#### 5 VDC TTL Differential Line Drive Current Sinking

Line driver output. 35 mA current sinking capability with  $2\text{K}\Omega$  internal pullup resistors. 5 VDC input voltage

**"H3"**

#### 8 to 28 VDC Differential Line Drive Current Sinking

Line driver output. 35 mA current sinking with  $10\text{K}\Omega$  internal pullup resistors. 8 to 28 VDC input voltage

**"H5"**

#### 5 VDC Push-Pull

Push-Pull circuit with 20 mA current sourcing and 20 mA current sinking capability. +5 VDC input voltage

### General

Available Measurement Ranges .... See Table 4, Page 8

Connector ..... MS3102E-14S-6P

Mating Connector (included) ..... MS3106E-14S-6S

### Performance

Linearity .....  $\pm 0.03\%$  Full Scale

Repeatability .....  $\pm 0.015\%$  Full Scale

Resolution ..... See Table Below

### Electrical

Input Voltage ..... +5 VDC  $\pm 5\%$

Input Current ..... 125 mA Maximum

Output ..... Current sinking (20 mA max.) two channel single-ended TTL square wave from LM339 open collector output stage.  $2\text{K}\Omega$  internal pullup resistors provided.

Phase Quadrature .....  $90^\circ \pm 20^\circ$

### Environmental

Operating temperature .....  $0^\circ\text{C}$  to  $70^\circ\text{C}$

Storage temperature .....  $-25^\circ\text{C}$  to  $90^\circ\text{C}$

Shock ..... 50 G's for 11 ms Duration

Vibration ..... 20 Hz to 2000 Hz @ 5G's

Humidity ..... 100%

### Ingress Protection


Exclusive of Wire Rope Area ..... NEMA 4 (IP-65)

Optional Ingress Protection ..... NEMA 6 (IP-68)

TABLE 2 ----- RESOLUTION

MODEL	RANGE (inch)	RANGE (mm)	RESOLUTION <sup>1</sup> (counts/inch)	RESOLUTION <sup>1</sup> (counts/mm)	TOLERANCE <sup>1</sup> ON RESOLUTION
HX-EP-10	10	250	500.0	19.69	$\pm 0.30\%$
HX-EP-25	25	640	250.0	9.84	$\pm 0.20\%$
HX-EP-50	50	1250	250.0	9.84	$\pm 0.20\%$
HX-EP-60	60	1.5 m	205.8	8.10	$\pm 0.20\%$
HX-EP-80	80	2.0 m	155.2	6.11	$\pm 0.20\%$
HX-EP-100	100	2.5 m	82.9	3.26	$\pm 0.20\%$
ALL RANGES GREATER THAN 100'	100	2.5 m	82.9	3.26	$\pm 0.20\%$

1. The resolution shown is a calculated number based upon the capstan diameter, wire rope diameter and line count of the encoding device. The tolerance on the resolution accounts for resolutinal differences from unit to unit due to manufacturing tolerances on the capstan and wire rope. In practice, the output count in a given unit of travel is an integer.

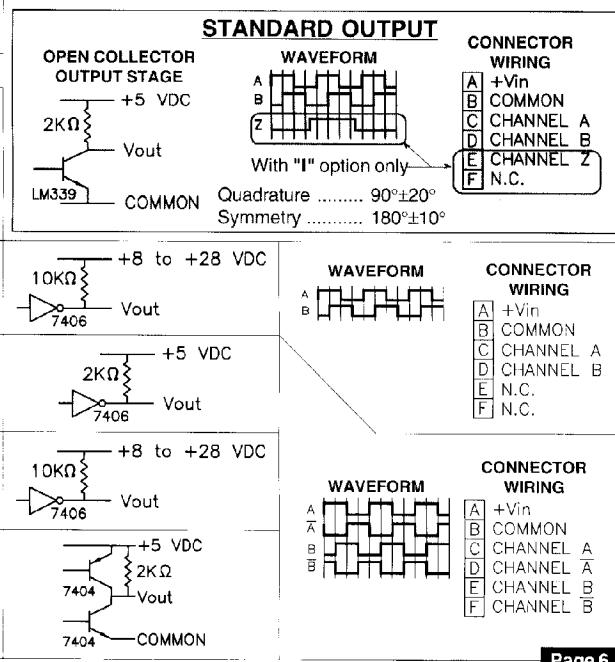

## Technische Daten

# HX-V SERIES

 UniMeasure

## VELOCITY OUTPUT

The UniMeasure HX-V series linear velocity transducer incorporates a self-generating tachometer which eliminates the need for any external power supply. Extra long brush life, excellent stability and a wide operating temperature range make the V series transducer highly reliable for long term service.

TABLE 3 ----- VELOCITY OUTPUT

MEASUREMENT RANGE DESIGNATOR	RANGE (in)	RANGE (mm)	VELOCITY OUTPUT (mV per 100 in/min.)	VELOCITY OUTPUT (mV per m/min.)
2, 10	10	250	333	131
3, 15, 30	15	390	227	89
4, 20, 40	20	500	171	67
5, 25, 50	25	640	137	54
60	60	1500	115	45
80	80	2000	87	34
100	100	2500	300	118
ALL RANGES GREATER THAN 100"	100	2500	300	118

### MODEL NUMBER CONFIGURATION

HX-V-\_\_\_\_\_

Measurement Range Designator  
from standard ranges shown in  
Table 4, page 8

Option designators from  
OPTIONS list (page 9) in order of  
appearance on OPTIONS list

### SPECIFICATIONS

#### General

Available Measurement Ranges .... See Table 4, Page 8

Connector ..... MS3102E-14S-6P

Mating Connector (included) ..... MS3106E-14S-6S

#### Electrical

Output ..... See Table

Linearity .....  $\pm 0.10\%$  F.S. within 25 Volt output

Ripple ..... 3% Max.

Input ..... None Required; Self Generating

Output Impedance .....  $350\Omega$

Thermal Effects ..... 0.01% Max. per Degree C  
through Range -20°C to 75°C

#### Environmental

Operating temperature ..... -20°C to 95°C

Storage Temperature ..... -55° to 100°C

Operating humidity ..... 100%


Vibration ..... 10G's to 2KHz

Shock ..... 50 G's 0.1 ms Max.

Ingress Protection

Exclusive of Wire Rope Area .... NEMA 4 (IP-65)


Optional Ingress Protection ..... NEMA 6 (IP-68)

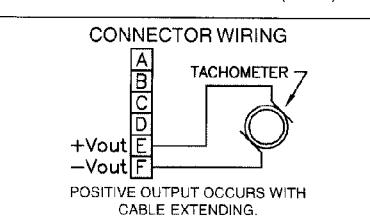

# HX-VPA SERIES

## VELOCITY-POSITION OUTPUT

The UniMeasure HX-VPA series combines a self-generating tachometer and a precision potentiometer to give an output of both velocity and analog position. Standard position output is ratiometric voltage. Optionally available position outputs include ratiometric voltage from a bridge circuit, 4 to 20 mA, 0 to 10 VDC, and  $\pm 10$  VDC. See HX-PB, HX-P420, HX-P510 and HX-P1010 data sheets for electrical specifications.

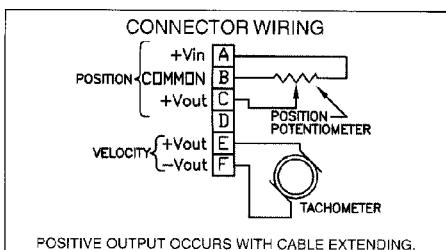

### MODEL NUMBER CONFIGURATION

HX-VPA-\_\_\_\_\_

For optional output, replace  
VPA with: VPB  
VP420  
VP510  
VP1010

Option designators from  
OPTIONS list (page 9) in order of  
appearance on OPTIONS list

Measurement Range Designator  
from standard ranges shown in  
Table 4, page 8

### SPECIFICATIONS

#### General

Available Measurement Ranges .... See Table 4, Page 8

Connector ..... MS3102A-14S-6P

Mating Connector (included) ..... MS3106E-14S-6S

#### Performance

Positional Linearity

2", 3", 4" & 5" Ranges .....  $\pm 0.25\%$  Full Scale

10", 15", 20" & 25" Ranges .....  $\pm 0.15\%$  Full Scale

All other ranges .....  $\pm 0.10\%$  Full Scale

Repeatability .....  $\pm 0.015\%$  Full Scale

Positional Resolution ..... Essentially Infinite

#### Electrical (Position)

Input Impedance ("A" Circuit) .....  $1000\Omega \pm 10\%$

Output Impedance ("A" Circuit) ..... 0 to  $1000\Omega$

Excitation Voltage ..... 25 Volts Max. AC or DC

Nominal Output Voltage .....  $990$  mV/V/inch

(Use total measurement range in calculation)

$990$  mV/V/mm

$Range$  in mm.

#### Electrical (Velocity)

Output ..... See Table 3, above

Linearity .....  $\pm 0.10\%$  F.S. within 25 Volt Output

Ripple ..... 3% Max.

Output Impedance .....  $350\Omega$

#### Environmental

Thermal Coeff't of potentiometer ....  $\pm 100$  PPM/°C max.

Operating temperature ..... -20°C to 95°C

Operating humidity ..... 100%

Vibration ..... 15 G's 0.1 ms max.

Shock ..... 50 G's 0.1 ms max.

Ingress Protection

Exclusive of Wire Rope Area .... NEMA 4 (IP-65)


Optional Ingress Protection ..... NEMA 6 (IP-68)

# HX

 UniMeasure

## MECHANICAL SPECIFICATIONS

SPECIFICATIONS

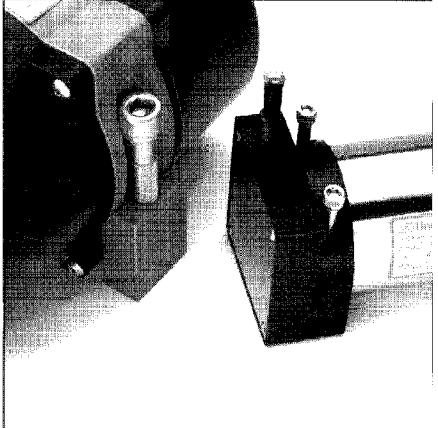

Typical HX mounting bolts.

### Mechanical Specifications

Available Measurement Ranges ..... See Table 4

#### Construction

Ranges 80" (2 m) and under ..... Anodized Aluminum Mounting Base, Stainless Steel & Anodized Aluminum Housing

Ranges 100" (2.5 m) and greater... Stainless Steel Mounting Base High Impact, Corrosion Resistant Polyurethane Housing

Wire Rope Tension ..... See Table 4

Wire Rope Diameter ..... See Table 4

Weight ..... See Table 4

Connector ..... MS3102A-14S-6P


Mating Connecotor (included) ..... MS3106E-14S-6S

Optional NEMA 6 Capability ..... Bulkhead fitting with 8' (2.5 m) of shielded, twisted pair cable


### When configuring model number:

MEASUREMENT RANGE DESIGNATOR	STANDARD MEASUREMENT RANGES (in) (mm)	APPLICABLE SERIES				WIRE ROPE TENSION (NOMINAL) (oz) (N)	WIRE ROPE DIAMETER (in) (mm)	WEIGHT (lb) (Kg)	DIMENSIONAL INFORMATION
		HX-PA HX-PB	HX-P420	HX-P510	HX-P1010	HX-EP	HX-V HX-VP		
2	2 50	✓	-	✓		34	9.4	.016 0.4	2 0.9
3	3 75	✓	-	✓		24	6.7	.016 0.4	2 0.9
4	4 100	✓	-	✓		24	6.7	.016 0.4	2 0.9
5	5 125	✓	-	✓		19	5.3	.016 0.4	2 0.9
6	6 150	✓	-	✓		24	6.7	.016 0.4	2 0.9
10	10 250	✓	-	✓	✓	34	9.4	.016 0.4	2 0.9
15	15 390	✓	-	✓		24	6.7	.016 0.4	2 0.9
20	20 500	✓	-	✓		24	6.7	.016 0.4	2 0.9
25	25 640	✓	-	✓	✓	19	5.3	.016 0.4	2 0.9
30	30 750	✓	-	✓		24	6.7	.016 0.4	2 0.9
40	40 1000	✓	-	✓		24	6.7	.016 0.4	2 0.9
50	50 1250	✓	-	✓	✓	19	5.3	.016 0.4	2 0.9
60	60 1500	✓	-	✓	✓	24	6.7	.016 0.4	2 0.9
80	80 2.0m	✓	-	✓	✓	21	5.8	.016 0.4	2 0.9
100	100 2.5m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
120	120 3.0m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
150	150 3.8m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
200	200 5.0m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
250	250 6.3m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
300	300 7.5m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
350	350 8.8m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
400	400 10.0m	✓	✓	✓	✓	36	10.0	.024 0.6	6.8 3.1
500	500 12.5m	✓	✓	✓	✓	36	10.0	.024 0.6	8.6 3.9
600	600 15.2m	✓	✓	✓	✓	36	10.0	.024 0.6	8.6 3.9
800	800 20.3m	✓	✓	✓	✓	36	10.0	.024 0.6	8.6 3.9
1000	1000 25.4m	✓	✓	✓	-	36	10.0	.024 0.6	12.0 5.4
1200	1200 30.4m	✓	✓	✓	-	36	10.0	.024 0.6	12.3 5.6
1600	1600 40.6m	✓	✓	✓	-	36	10.0	.024 0.6	14.1 6.4
1800	1800 45.7m	✓	✓	✓	-	36	10.0	.021 0.6	15.9 7.2
2000	2000 50.8m	✓	✓	✓	-	36	10.0	.021 0.5	16.3 7.4

TABLE 4



See Fig. 1, Page 10 for Dimensional Information

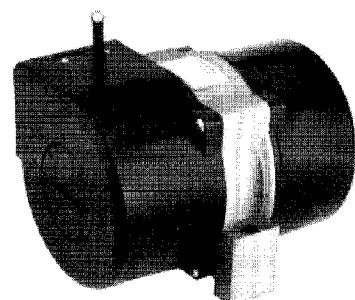

See Fig. 2, Page 10 for Dimensional Information





Specifications subject to change without notice.

## Technische Daten

# HX


 UniMeasure

## OPTIONS

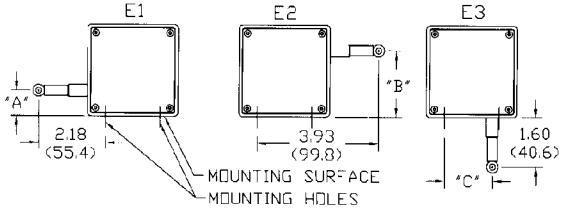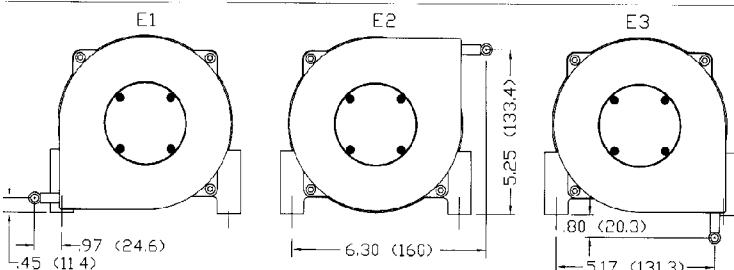
OPTION	OPTION DESIGNATOR	DESCRIPTION																												
Nylon jacketed wire rope (Ranges to 80")	NJC	Replaces standard stainless steel wire rope with Ø.018 nylon jacketed wire rope. This option increases wire rope life dramatically but may increase non-linearity by as much as ±.05% of full scale.																												
Nylon jacketed wire rope (Ranges 100" to 400" only)	NJC037	Replaces standard stainless steel wire rope with Ø.037 nylon jacketed wire rope.																												
Reversed output	R	Output is at a maximum when wire rope is fully retracted. Output decreases as wire rope is extended. Does not apply to velocity signal.																												
NEMA 6, IP-68 capability	N6	 Connector is replaced with a bulkhead fitting and 8' (2.4 m) of urethane jacketed, shielded, twisted pair cable. Retraction mechanism and electrical components are sealed to NEMA 6, IP-68 capability.																												
Stainless steel construction (Ranges to 80" only)	SS	 All anodized aluminum parts on transducer housing are replaced with stainless steel. Transducer is sealed to NEMA 6, IP-68 capability. Eight feet (2.4 m) of urethane jacketed, shielded, twisted pair cable exits unit. No connector.																												
Non-standard potentiometer (Applies to HX-PA only)	PXK	Replace "X" in option designator with required potentiometer value in K ohms. Non-standard potentiometer linearity is as follows: Ranges 0 to 2" to 0 to 5" ..... ±1.00% of full scale Ranges 0 to 10" to 0 to 25" ..... ±0.50% of full scale Ranges 30" and above ..... ±0.25% of full scale Note: This option is subject to potentiometer availability.																												
Alternate wire rope exit Measurement ranges to 80" (2.0 m)	E1, E2, E3 Specify from orientation shown.	 <table border="1"> <thead> <tr> <th>RANGE</th> <th>"A"</th> <th>"B"</th> <th>"C"</th> </tr> </thead> <tbody> <tr> <td>2", 10"</td> <td>1.12(28.4)</td> <td>1.79(45.5)</td> <td>1.21(30.7)</td> </tr> <tr> <td>3", 15", 30"</td> <td>.96(24.4)</td> <td>1.95(49.5)</td> <td>1.37(34.8)</td> </tr> <tr> <td>4", 20", 40"</td> <td>.80(20.3)</td> <td>2.11(53.6)</td> <td>1.53(38.9)</td> </tr> <tr> <td>5", 25", 50"</td> <td>.64(16.3)</td> <td>2.27(57.7)</td> <td>1.69(42.9)</td> </tr> <tr> <td>60"</td> <td>.49(12.4)</td> <td>2.42(61.5)</td> <td>1.84(46.7)</td> </tr> <tr> <td>80"</td> <td>.25(6.4)</td> <td>2.66(67.6)</td> <td>2.08(52.8)</td> </tr> </tbody> </table> <p>Dimensions in brackets are millimeters.</p>	RANGE	"A"	"B"	"C"	2", 10"	1.12(28.4)	1.79(45.5)	1.21(30.7)	3", 15", 30"	.96(24.4)	1.95(49.5)	1.37(34.8)	4", 20", 40"	.80(20.3)	2.11(53.6)	1.53(38.9)	5", 25", 50"	.64(16.3)	2.27(57.7)	1.69(42.9)	60"	.49(12.4)	2.42(61.5)	1.84(46.7)	80"	.25(6.4)	2.66(67.6)	2.08(52.8)
RANGE	"A"	"B"	"C"																											
2", 10"	1.12(28.4)	1.79(45.5)	1.21(30.7)																											
3", 15", 30"	.96(24.4)	1.95(49.5)	1.37(34.8)																											
4", 20", 40"	.80(20.3)	2.11(53.6)	1.53(38.9)																											
5", 25", 50"	.64(16.3)	2.27(57.7)	1.69(42.9)																											
60"	.49(12.4)	2.42(61.5)	1.84(46.7)																											
80"	.25(6.4)	2.66(67.6)	2.08(52.8)																											
Alternate wire rope exit Measurement ranges 100" (2.5 m) and greater.	E1, E2, E3 Specify from orientation shown.	 <p>Dimensions in brackets are millimeters.</p>																												

## Technische Daten

**HX**



**Measurement Ranges to 80" (2 m)**

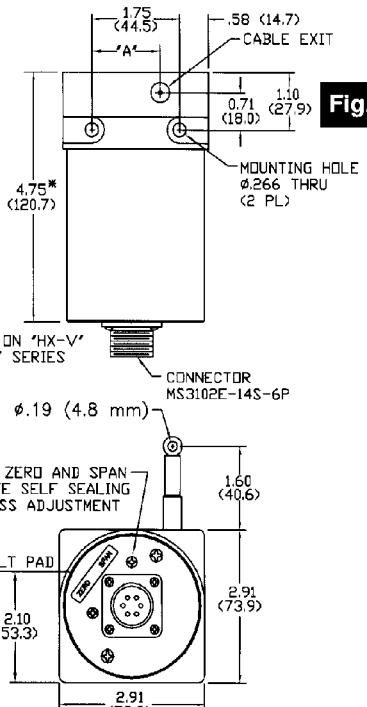

**Fig. 1**

\*5.62 (142.9) IN 'HX-V' AND 'HX-VP' SERIES

ON MODELS WITH ZERO AND SPAN CONTROLS, REMOVE SELF SEALING SCREWS TO ACCESS ADJUSTMENT POTENTIOMETERS.

MOUNTING BOLT PAD

RANGE	"A"
2", 10"	1.21 (30.7)
3", 15", 30"	1.37 (34.8)
4", 20", 40"	1.53 (38.9)
5", 25", 50"	1.69 (42.9)
60"	1.84 (46.7)
80"	2.08 (52.8)


RANGE	DIM "A"	DIM "B"
Ranges to 800"	7.70 (19.6)	3.80 (96.5)
1000" to 2000"	11.0 (280.0)	5.60 (142.0)

**Notes**


- Transducer mounts with Ø.25 or M6 socket head cap bolts.

**UniMeasure**

## DIMENSIONAL INFORMATION

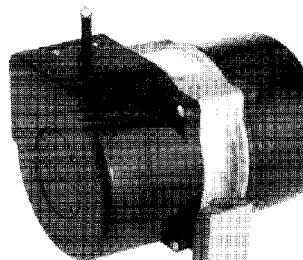

**Measurement Ranges 100" (2.5 m) and greater**

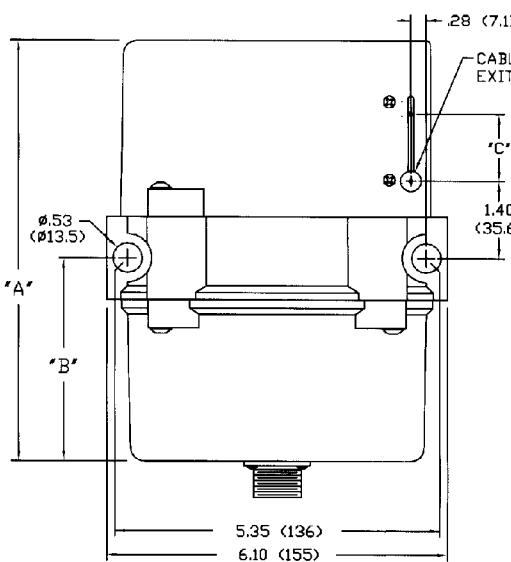

**Fig. 2**

ON MODELS WITH ZERO AND SPAN CONTROLS, REMOVE SELF SEALING SCREWS TO ACCESS ADJUSTMENT POTENTIOMETERS.

MOUNTING BOLT PAD

ZERO SPAN

RANGE	DIM "A"	DIM "B"
Ranges to 800"	7.70 (19.6)	3.80 (96.5)
1000" to 2000"	11.0 (280.0)	5.60 (142.0)

**Dimensions in brackets are millimeters.**

Specifications subject to change without notice.

Page 10

Diese Daten können jederzeit ohne Vorankündigung geändert werden